


L-SERIES – Variable Frequency Drive WATER-COOLED* TWO-STAGE

Dimensions and Specifications *Typical, do not use for construction. (Drawings are provided with order acknowledgement.)*

Model	Motor HP	Max. Pressure PSIG	Free Air Delivery CFM	Length In.	Width In.	Height In.	Net Weight Lbs.
KNW00-A/XL	25	100	65-75	92	40	60	2515
KNW00-B/XL	30	100	65-95	92	40	60	2535
KNW00-C/XL	40	115	110-127	92	40	60	2535
KNW00-D/XL	50	115	110-167	92	40	60	2650
KNW00-E/XL	60	115	110-209	92	40	60	2825
KNW0-A/XL	50	110	80-172	94	49	53	3350
KNW0-B/XL	60	110	80-223	94	49	53	3550
KNW0-C/XL	75	110	80-292	94	49	53	3600
KNW0-D/XL	100	135	80-331	94	49	53	3650
KNW1-A/XL	100	125	280-413	136	62	60	5580
KNW1-B/XL	125	125	280-504	136	62	60	5800
KNW1-C/XL	125	120	280-534	136	62	60	5850
KNW1-D/XL	150	125	280-618	136	62	60	6150
KNW1-E/XL	150	115	280-653	136	62	60	6200
KNW1-F/XL	200	135	280-728	136	62	60	6400
KNW1-G/XL	200	125	280-818	136	62	60	6450
KNW2-A/XL	200	110	535-915	160	75	72	9950
KNW2-B/XL	250	125	535-1102	160	75	72	10100
KNW2-C/XL	300	125	535-1316	160	75	72	10800
KNW2-D/XL	350	115	535-1559	160	75	72	11400
KNW3-A/XL	400	125	1500-1765	175	82	92	13500
KNW3-B/XL	450	125	1500-1936	175	82	92	13700
KNW3-C/XL	500	125	1500-2155	175	82	92	14100

* For air-cooled requirements refer to bulletin KNWA/XL

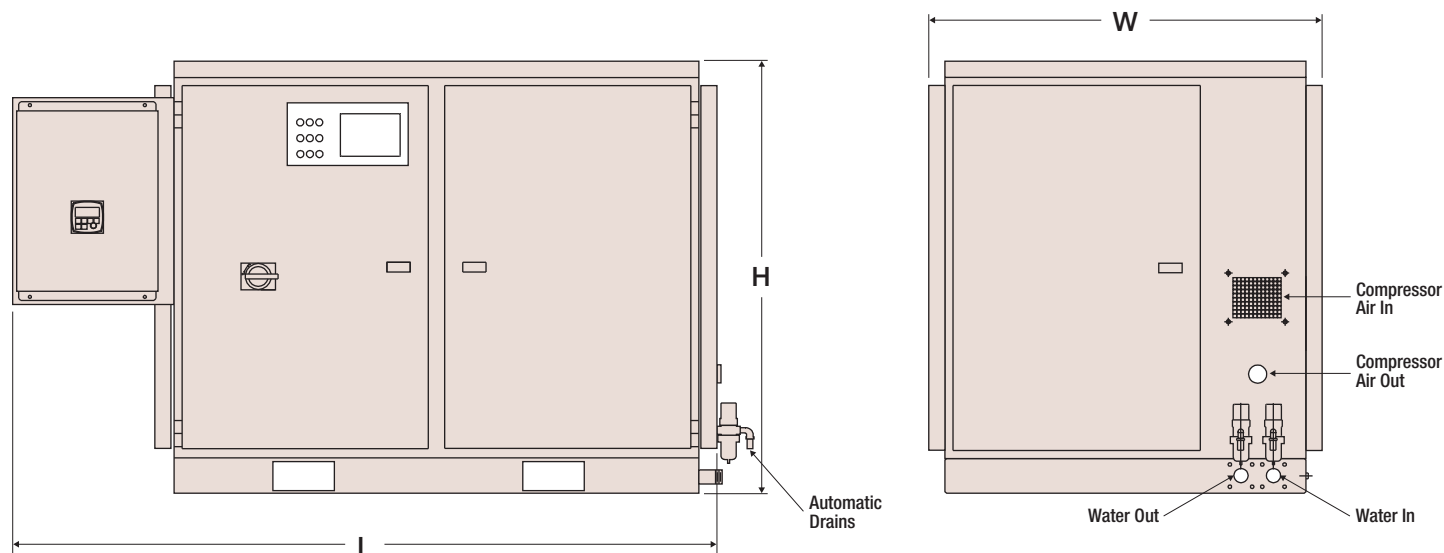

Standard Equipment and Safety Devices

Controls and Instrumentation

Service Indicators

- Air inlet filter condition
- Oil filter condition
- Oil level gauge
- Routine maintenance

Pressure Indicators

- First stage air discharge
- Second stage air discharge
- Oil lubrication
- First Stage Inlet

Temperature Indicators

- First stage air discharge
- Second stage air inlet
- Second stage air discharge
- Oil lubrication
- Compressor discharge temperature
- First Stage Inlet

Additional Indicators

- Stand-by mode light
- Run Light
- Oil pump
- Fan run
- Compressor run
- Compressor load light
- Alert light
- Alarm light
- Hour meter – running time
- Hour meter – loaded time
- Manual unload display
- Lead/Lag (Optional)
- Local/Remote (Optional)
- Auto restart after PF

ROGERS
MACHINERY
COMPANY, INC.

KOBELCO
KNW SERIES

14650 SW 72nd Avenue
Portland, Oregon 97224-7943
P.O. Box 230429
Portland, Oregon 97281-0429
Phone (503) 639-0808
Fax (503) 639-0111
E-mail: kobelco@rogers-machinery.com
www.knw-series.com

Safety Devices

All safety shutdowns, indicated by message on display and alarm light

- Compressor motor overload shutdown
- Oil pump motor overload shutdown
- Fan motor overload shutdown
- High first stage air discharge temperature shutdown
- High second stage suction temperature shutdown
- High second stage air discharge temperature shutdown
- High oil temperature shutdown
- Low oil pressure shutdown
- High cabinet temperature shutdown
- Starter failure

- Temperature pre-shutdown alert
- Compressor discharge temperature shutdown

Additional Devices

- E-Stop
- Start/stop push buttons
- Lamp test
- Audible alarm
- Acknowledge
- Reset push button
- Common alarm contacts for remote indication
- Event alarm log
- Trend charts
- Internet options
- Data logging
- Color monitor

Additional Features

Packaged Assembly

- Air-cooled or water cooled
- Integral air-cooled or water-cooled aftercooler with moisture separator and automatic drain
- Cabinet ventilating fan
- Easy access for maintenance
- Removable doors
- Low installation cost
- Few connections required for installation – compressed air, condensate drains, electrical and water (when required)
- CSA certified panel



Advanced Design

- Super Rotor delivers more cfm per horsepower
- Patent numbers 4583927 & 4671749

Efficient Control

- Load/unload electro-pneumatic
- DC link reactor
- Variable frequency drive

Vibration Free

- No vibration generated in rotary design
- No special foundation required

Standard and optional equipment subject to change without notice.

DISTRIBUTED BY: